



Because Privacy Matters



Kubebooth Technical Data Sheet - Kme

Easy to Install

Size Overall - W: 88" - D: 37" - H: 88"
Inside - W: 80" - D: 36" - H: 80"

Weight
1200 lbs/544 kg

Glass
10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 32"
Rear Panel - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 28"

Reversible Door

Fully interchangeable left or right opening

Floor Ceiling

Substructure-rated MDF on unitized steel base.

Felt

Interior sound absorption panels
60% recyclable

Options

- Seismic bracing
- One touch LCD control panel
- LCD TV mount bracing
- White glass board - W: 34" x L: 30"
- Personalized company branding
- Ethernet ports
- Bluetooth speaker
- Frosted film glass
- External fire extinguisher unit
- Occupancy lights

Moveable

Acoustics
NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange
100 complete air changes per hour

Data Center

- UL approved
- 1 USB A port, 1 USB C port
- 2 Simplex outlets
- Motion detector (controls light & fan)


Plug & Play

Mobility Kit
Includes casters with fasteners

Light
12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler
Pre-engineered knockout hole for 3rd party sprinkler installation

Power Cord
10ft cord 120V/15Amp

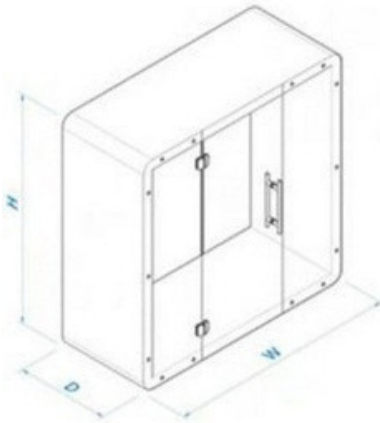

Wall Construction


- Galvanized steel frames
- Sound insulation in all cavities

Finishes

- D-pull handle
- TFL surface
- CARB certified (zero/low formaldehyde emissions)
- Aluminum hardware painted

Carpet

- Shaw Commercial Philadelphia Ayers Hall II or equal
- Solution dyed polypropylene 28 oz, 10 gauge
- GreenGuard certified GLP8472 <450 NBS smoke

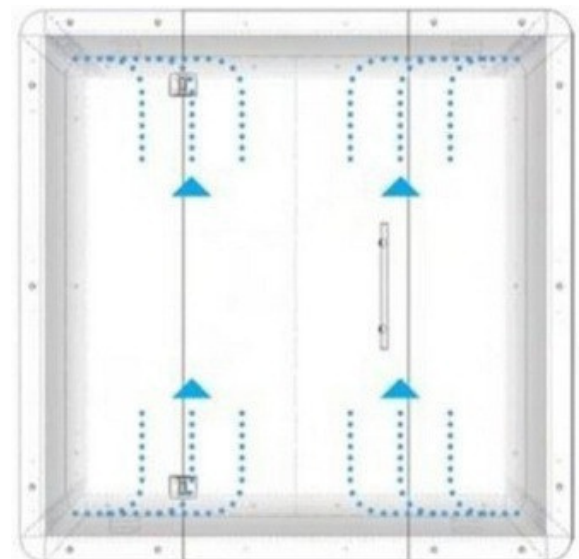

*Air Flow Diagram

