




Because Privacy Matters



Kubebooth Technical Data Sheet - Kme Floorless

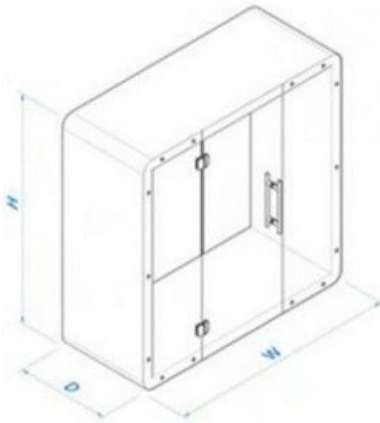

Easy to Install

Size
Overall - W: 88" - D: 37" - H: 88"
Inside - W: 80" - D: 36" - H: 84"

Weight
1100 lbs/500 kg

Glass
10mm clear tempered
Door - H: 88" x W: 32"
Rear Panel - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 28"

Plug & Play

Acoustics
NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange
100 complete air changes per hour

Data Center
UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Light
12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler
Pre-engineered knockout hole for 3rd party sprinkler installation

Power Cord
10ft cord 120V/15Amp

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Door Lock

Patch fit low noise- silent latch

Finishes

TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Reversible Door


Fully interchangeable left or right opening

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights

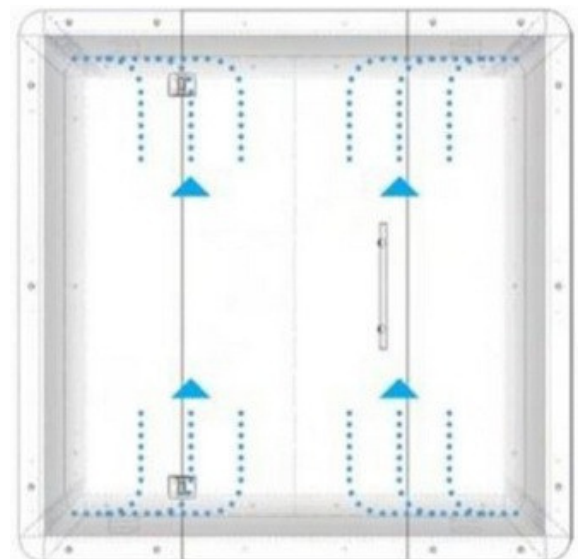

*Air Flow Diagram

