




Because Privacy Matters



Kubebooth Technical Data Sheet - Kteam 4

Extendable

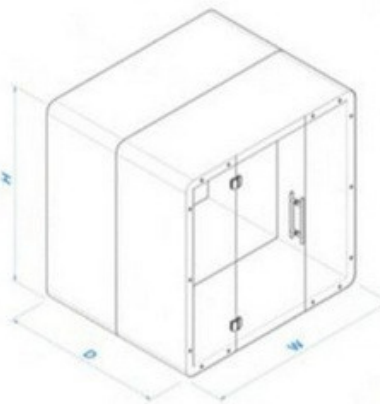

Easy to Install

Moveable

Plug & Play

Size Overall - W: 88" - D: 73" - H: 88"
Inside - W: 80" - D: 72" - H: 80"

Weight
1800 lbs/816 kg

Glass
10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 32"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 28"

Acoustics
NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange
100 complete air changes per hour

Data Center
UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Mobility Kit
Includes casters with fasteners

Light
12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler
Pre-engineered knockout hole for 3rd party sprinkler installation

Power Cord
10ft cord 120V/15Amp

Reversible Door
Fully interchangeable left or right opening

Worktop
White or Black laminate wood worktop
D Shape L: 45" x W: 24"
Installed at an optimum height of 28"

Felt
Interior sound absorption panels
60% recyclable


Options
Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Smart lock
Occupancy lights

Wall Construction
Galvanized steel frames
Sound insulation in all cavities

Finishes
D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet
Shaw Commercial Philadelphia
Ayers Hall II or equal
Solution dyed polypropylene 28 oz, 10 gauge
GreenGuard certified GLP8472
<450 NBS smoke

Floor Ceiling
Substructure-rated MDF on unitized steel base.

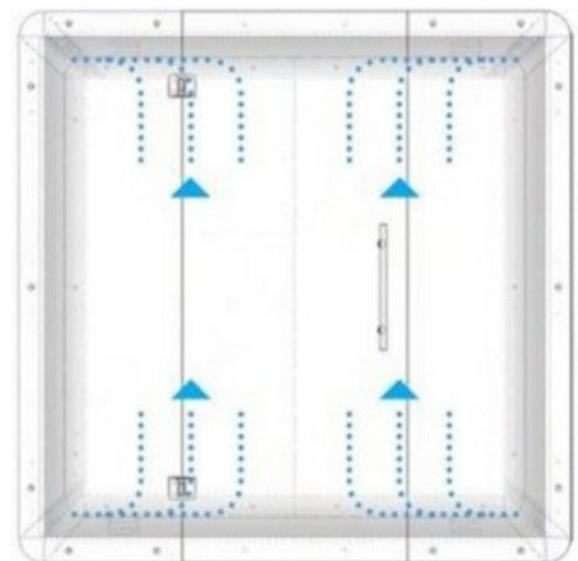

*Air Flow Diagram

