




Because Privacy Matters



## Kubebooth Technical Data Sheet - Kwe

### Extendable

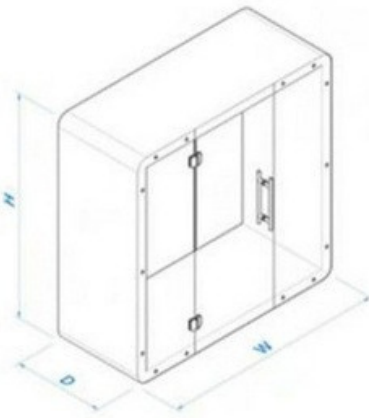

### Easy to Install

**Size Overall** - W: 88" - D: 37" - H: 88"  
**Size Inside** - W: 80" - D: 36" - H: 80"

**Weight**

1200 lbs/544 kg

**Glass**

10mm clear tempered  
Ceramic painted borders  
Door - H: 88" x W: 32"  
Rear Panels - H: 88" x W: 44"  
Front Side Panels - H: 88" x W: 28"

**Reversible Door**

Fully interchangeable left or right opening

**Worktop**

White or Black laminate wood worktop  
D shape L: 24" x W:24"  
Installed at an optimum height of 28"

**Felt**

Interior sound absorption panels 60% recyclable

**Options**

Seismic bracing  
One touch LCD control panel  
LCD TV mount bracing  
White glass board - W: 34" x L: 30"  
Personalized company branding  
Ethernet ports  
Bluetooth speaker  
Frosted film glass  
External fire extinguisher unit  
Smart lock  
Occupancy lights

### Moveable

**Acoustics**

NIC rating of 36 dB certified  
Noise cancellation technology

**Air Exchange**

100 complete air changes per hour

**Data Center**

UL approved  
1 USB A port, 1 USB C port  
2 Simplex outlets  
Motion detector (controls light & fan)

### Plug & Play

**Mobility Kit**

Includes casters with fasteners

**Light**

12V LED light bar with magnet  
570mm/pcs super light bar, 3500K, 12VDC

**Sprinkler**

Pre-engineered knockout hole for 3rd party sprinkler installation

**Power Cord**

10ft cord 120V/15Amp

**Wall Construction**

Galvanized steel frames  
Sound insulation in all cavities

**Finishes**


D-pull handle  
TFL surface  
CARB certified  
(zero/low formaldehyde emissions)  
Aluminum hardware painted

**Carpet**

Shaw Commercial Philadelphia  
Ayers Hall II or equal  
Solution dyed polypropylene 28 oz, 10 gauge  
GreenGuard certified GLP8472  
<450 NBS smoke

**Floor Ceiling**

Substructure-rated MDF on unitized steel base.

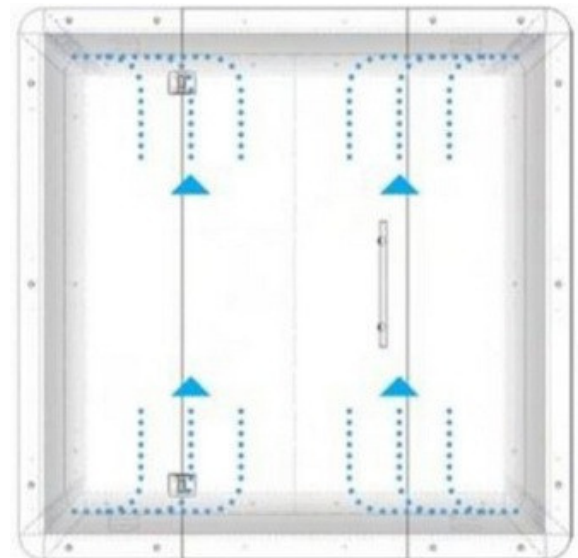

\*Air Flow Diagram

