



Because Privacy Matters



Kubebooth Technical Data Sheet - Kwe Floorless

Extendable

Easy to Install

Plug & Play

Size Overall - W: 88" - D: 37" - H: 88"
Inside - W: 80" - D: 36" - H: 84"

Weight
 1100 lbs/500 kg

Glass
 10mm clear tempered
 Door - H: 88" x W: 32"
 Rear Panels - H: 88" x W: 44"
 Front Side Panels - H: 88" x W: 28"

Acoustics
 NIC rating of 36 dB certified
 Noise cancellation technology

Air Exchange
 100 complete air changes per hour

Data Center
 UL approved
 1 USB A port, 1 USB C port
 2 Simplex outlets
 Motion detector
 (controls light & fan)

Light
 12V LED light bar with magnet
 570mm/pcs super light bar, 3500K, 12VDC

Sprinkler Pre-engineered knockout hole for 3rd party sprinkler installation

Power Cord
 10ft cord 120V/15Amp

Reversible Door
 Fully interchangeable left or right opening

Worktop
 White or Black laminate wood worktop
 D shape L: 24" x W: 24"
 Installed at an optimum height of 28"


Felt
 Interior sound absorption panels
 60% recyclable

Options
 Seismic bracing
 One touch LCD control panel
 LCD TV mount bracing
 White glass board - W: 34" x L: 30"
 Personalized company branding
 Ethernet ports
 Bluetooth speaker
 Frosted film glass
 External fire extinguisher unit
 Door lock
 Occupancy lights

Door Lock
 Patch fit low noise- silent latch

Wall Construction
 Galvanized steel frames
 Sound insulation in all cavities

Finishes
 TFL surface
 CARB certified
 (zero/low formaldehyde emissions)
 Aluminum hardware painted

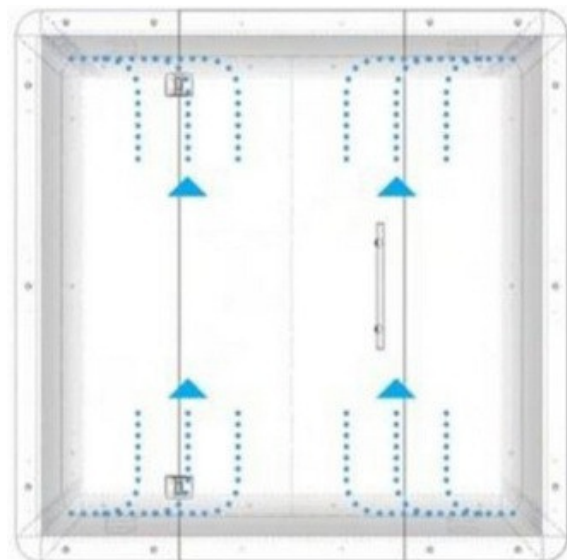

*Air Flow Diagram

